

**VpCI® FORMULATED PRODUCTS FOR PROCESS INDUSTRIES**

# CorroLogic™ VpCI®-637 TOL

Systems for Top of Line Corrosion Protection of Pipelines



**PRODUCT DESCRIPTION**

CorroLogic™ VpCI®-637 TOL provides corrosion control in natural gas and crude oil gathering and transmission lines, including the difficult Top-of-Line (TOL) corrosion problems.

CorroLogic™ VpCI®-637 TOL is a combination of vapor phase and film-forming corrosion inhibitors. It is particularly useful in combating the corrosion caused by condensation of acidic vapor in areas inaccessible by direct contact. It also provides excellent protection to Bottom-of-the-Line (BOL) corrosion caused by corrosive fluids. CorroLogic™ VpCI®-637 TOL is able to partition through hydrocarbon to reach aqueous phase, and to function in a variety of flow reigns.

The unique chemistries of CorroLogic™ VpCI®-637 TOL enable the product to protect internal pipelines in “sweet/sour” saturated carbon dioxide/hydrogen sulfide environment.

**FEATURES**

- Effective for a wide range of systems and corrosive conditions
- Provide maximum control over long distances for highly corrosive systems with a high water-to-hydrocarbons ratio, including TOL and low areas in systems where water collects and extreme corrosive attack occurs
- Particularly effective in mitigating the corrosion caused by condensation of acidic vapor in areas inaccessible by direct contact
- Forms an adsorbed, protective layer that protects ferrous and non-ferrous metals
- Effective against water, corrosive gases, and halogens
- Vapor phase action provides protection from atmospheric conditions and moisture condensation to areas not accessible by filming inhibitors
- Does not contain heavy metals, chlorinated hydrocarbons, or volatile amines

**TYPICAL APPLICATIONS**

CorroLogic™ VpCI®-637 TOL is designed for use in natural gas pipelines and petroleum recovery processes, most effective in situations prone to TOL corrosion attacks.

**METHOD OF APPLICATION**

CorroLogic™ VpCI®-637 TOL is best applied by continuous injection or atomization into the transmission line. Atomization of the product into the gas stream enhances the dispersion and length of travel. Generally, dose rate of 10-30 fl oz (300-900ml) of the product per million cubic feet of gas is sufficient for the majority of applications.


**PERFORMANCE**

- **Protection by CorroLogic™ VpCI®-637 TOL in Acidic Vapor with Condensation**

-- Small Scale Corrosion Test --  
(condensate pH 3 to 4, temperature 70°C)

Inhibitor Tested	CR (mpy)*	% Protection
250 ppm TOL	1.1	96
125 ppm TOL	5	77
1000 ppm conventional	11	56

\*CR=25mpy when no inhibitor was used (control)

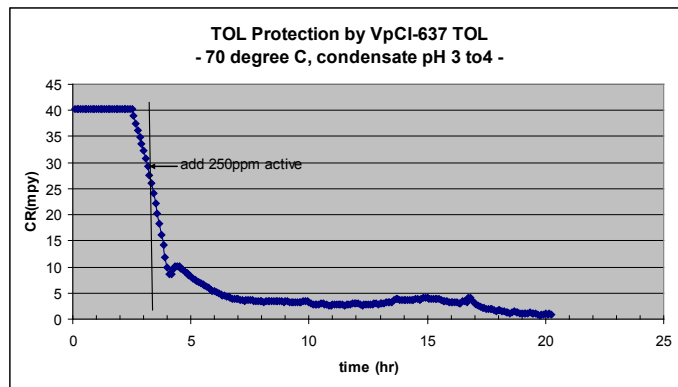

• Protection by CorroLogic™ VpCI®-637 TOL in Acidic Brine/Hydrocarbon

Test	CR (mpy) -Control-	CR(mpy) -50ppm active VpCI-637 TOL-	% Protection
Bubble Test**	130	4.4	97
Rotating Cylinder Electrode Test** (ASTM G 170)	130	14	89

**TYPICAL PROPERTIES**

Appearance	Amber liquid
Non-Volatile Content	47-50%
pH	8.3-8.8 (neat)
Density	8.4-8.7 lb/gal (1.01-1.04 kg/l)
Pour Point	-35°F (-37°C)

**STORAGE/PACKAGING**

CorroLogic™ VpCI®-637 TOL is available in 5 gallon (19 liter) containers, 55 gallon (208 liter) metal drums, liquid totes, and bulk. Products should be stored in tightly closed containers.

\*\* Test Conditions

Parameters	Value
Working electrode	G10180 (SAE1018)
Test electrolyte	3.58% Synthetic Sea Salt in DI + 5% commercial diesel (wt)
Purging gas	CO2 @5x10 <sup>-6</sup> (m3/s)
pH of brine	4.5-5
Temperature	58°C
RPM of Cylinder Electrode (for RCE)	1000
Est. Liquid Reynolds number (for RCE)	>10,000
Inhibitor, concentration	VpCI-637TOL 50ppm active
Corr. rate measurement	LPR, w/o inhibitor, and 20 h after inhibitor addition

**FOR INDUSTRIAL USE ONLY**

**KEEP OUT OF REACH OF CHILDREN**

**KEEP CONTAINER TIGHTLY CLOSED**

**NOT FOR INTERNAL CONSUMPTION**

**CONSULT SAFETY DATA SHEET FOR MORE INFORMATION**

**LIMITED WARRANTY**

All statements, technical information and recommendations contained herein are based on tests Cortec Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.


BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Distributed by:



4119 White Bear Parkway, St. Paul, MN 55110 USA  
 Phone (651) 429-1100, Fax (651) 429-1122  
 Toll Free (800) 4-CORTEC, E-mail info@cortecvci.com  
 Internet http://www.CortecVCI.com

printed on recycled paper  100% post consumer  
 Revised 7/17/13. Cortec Corporation 2013. All rights reserved. Supersedes: NONE.  
 VpCI® is a trademark of Cortec Corporation. © 2013, Cortec Corporation. All Rights Reserved. Copying of these materials in any form without the written authorization of Cortec Corporation is strictly prohibited.  
 ISO accreditation applies to Cortec's processes only.