






HIGH PERFORMANCE VPCI® PACKAGING

CorroLogic® Tube Strips powered by Nano VpCI®

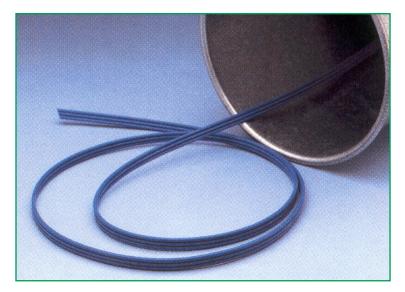

DESCRIPTION

CorroLogic® Tube Strips powered by Nano VpCl® is designed for protection of tubes, pipes, or conduits in storage or during shipping. Using VpCl® technology, CorroLogic® Tube Strips powered by Nano VpCl® makes it possible to protect the interior of a tube or pipe against corrosion without expensive internal coatings. The flexible strip has a 1/3 inch diameter (8.5 mm). It is extruded from low density polyethylene containing a proprietary VpCl® compound designed for protection of ferrous and non-ferrous metals and alloys.

BENEFITS

- Simple and safe to use
- VpCI® vapor will not interfere with subsequent processing (i.e. welding) and will not affect the chemistry if media being used during start-up of tubular systems
- · No halogens, heavy metals, or sulfur

METHOD OF APPLICATION

CorroLogic® Tube Strips powered by Nano VpCl® is placed inside the tube or pipe, which is then capped or sealed. The length of Pipe Strip should equal the length of pipe. Within hours, the vapors from the Pipe Strip saturate the enclosed air space. Even in the presence of water vapor (high humidity conditions), the VpCl® vapors protect the metal surface, thus halting the process of corrosion.

TYPICAL PROPERTIES

Feet per reel 500 Meters per reel 152 m

Rod diameter 1/3 inch (8.5 mm)

Life Span 2 years Shelf Life 3 years

LIMITATIONS

CorroLogic® Tube Strips powered by Nano VpCl® is recommended only for pipe diameters up to 6 inches (15.2 cm). For pipes with inside diameters greater than 6 inches (15.2 cm), Cortec® VpCl® powders (VMCl 307®, VpCl®-309, and VpCl®-609) or Cortec® Pouches (VpCl®-308 Pouch, VpCl®-309 Pouch and EcoPouch®), or VpCl®-150/VpCl®-170 Tapes are recommended. Consult Cortec® Technical Service for further options.

METALS PROTECTED

- Carbon Steel
- Galvanized Steel
- Aluminum
- Copper and alloys
- Brass
- Stainless Steel

PACKAGING AND STORAGE

CorroLogic® Tube Strips powered by Nano VpCI® comes in standard 500 feet (152 m) rolls.



FOR INDUSTRIAL USE ONLY **KEEP OUT OF REACH OF CHILDREN KEEP CONTAINER TIGHTLY CLOSED NOT FOR INTERNAL CONSUMPTION**

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to

use the products.
BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE,

AND USERASSUMESALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



4119 White Bear Parkway, St. Paul, MN 55110 USA Phone (651) 429-1100, Fax (651) 429-1122 Toll Free (800) 4-CORTEC, E-mail info@cortecvci.com https://www.cortecvci.com

Printed on recycled paper 100% post consumer



Distributed by:

Revised: 07/23/18. Supercedes: 07/05/18. ©Cortec Corporation 2002-2018 of Cortec® Corporation.

All Rights Reserved. Copying of these materials in any form without the written authorization of Cortec® Corporation is strictly prohibited. 2018, ©Cortec Corp. ISO accreditation applies to Cortec's processes only.