




CORTEC
CORPORATION

Environmentally Safe VpCI®/MCI® Technologies

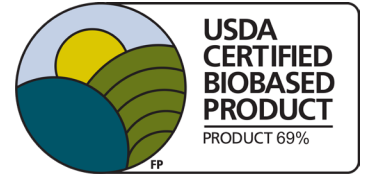

EcoShield® VpCI®-144 Paper, Patented with 100% Repulpable Content (USDA certified biobased 69%)

DESCRIPTION

EcoShield® VpCI®-144 is the premium repulpable moisture barrier corrosion inhibiting paper in the industry. It is coated with a water-based barrier coating and shows excellent oil and grease resistance. It also contains 69% USDA certified biobased content and is a qualified product under the mandatory federal purchasing initiative of the USDA BioPreferred® Program.*

Historically, polyethylene and wax coatings have been used to seal porous paper to provide a moisture barrier and/or moisture-vapor barrier. When coated this way, the resulting paper product is an environmental problem and cannot be recycled through normal channels. EcoShield® VpCI®-144 paper provides a competitive environmentally friendly alternative to polyethylene and wax paper, with comparable water vapor barrier properties. It is fully recyclable/repulpable into other types of paper products such as boxes, cardboard, and other corrugated materials.

PACKAGING & STORAGE

Roll stock: 36" x 600' (91.4 cm x 182.9 m), 48" x 600' (12.9 cm x 182.9 m). Custom rolls and sheets available in a wide variety of sizes.

To ensure best product performance, store in original packaging, indoors, and out of direct sunlight at 40-100 °F (4-38 °C).

Shelf life: 2 years

HIGH PERFORMANCE VPCI® PACKAGING



FEATURES

- Combines corrosion protection, moisture barrier properties, oil and grease resistivity
- Fully repulpable according to Fibre Box Association Voluntary Standard
- Contains no nitrites, phosphates, silicones, chromates, other heavy metals, or toxic products
- One product protects against corrosion of ferrous and non-ferrous metals
- Passes TAPPI T 240 om-12 Repulpability Testing (**See Table 1**)
- Commercially equivalent to military specifications MIL-P-3420E
- Conforms to NACE Standards TM0208-2008 and RP0487-2000
- Packaged parts do not need to be cleaned prior to coating or other surface finishing applications

TYPICAL APPLICATIONS

EcoShield® VpCI®-144 paper can be used to protect products for storage and shipment in a wide variety of ways: end closures for shipping tubes, insert strips for recessed areas in large packages, and sheet liners or separators between products. Typical applications are

- Metal production: coils, wire reels, plate, bar, etc.
- Metal forging and die casting: raw and machined forgings and castings
- Metalworking: stamping, sheet metal work, springs, bearings, fasteners, tubes, pipes, jewelry, silverware, etc.
- Finished products: engines, machinery, equipment, tools, hardware, appliances, instruments, motors, etc.
- Electrical and electronic: components, controls, printed circuit boards, etc.

METALS PROTECTED

- Carbon Steel
- Stainless Steel
- Galvanized Steel
- Cast Iron
- Aluminum Alloys
- Copper
- Brass (≤30% Zn)
- Solder

*For more information about the BioPreferred® Program, go to <http://www.biopreferred.gov>.

EcoShield® VpCI®-144 Paper, Patented

TYPICAL PROPERTIES

Property	TAPPI Method	Unit	Cortec®
Basis	T-410	lbs/3000 ft ² (g/m ²)	48 (78)
Caliper (thickness)	T-411	mils (micrometers)	4.6 (115)
Tear - MD	T-414	g	47.5
Tear - CD	T-414	g	58.5
Dry Tensile - MD	T-494	lbs/in (kg/mm)	47.1 (0.84)
Dry Tensile - CD	T-494	lbs/in (kg/mm)	17.7 (0.31)
TEA-MD	T-494	ft-lbs/ft (J/m ²)	1.9 (20.5)
TEA-CD	T-494	ft-lbs/ft (J/m ²)	3.6 (38.8)
Stretch-MD	T-404	%	1.5
Stretch-CD	T-404	%	4.3
Ink Resistance	T-530	seconds	15
Smooth-Nonprint	T-538	sheffield	240
Smooth-VCI	T-538	sheffield	231
Internal Bond	T-541	ft-lbs/in (J/cm)	0.17 (0.064)
Abrasion-Nonprint	T-476	g loss/100 rev	0.007
Abrasion - VCI	T-476	g loss/100 rev	0.002

MD=Machine Direction
CD=Cross Direction

METHOD OF APPLICATION

Products should be packaged as soon after cleaning as possible. Keep the EcoShield® VpCI®-144 paper as close to the surface of the product as practical, leaving no barrier between the EcoShield® VpCI®-144 paper and the metal surface to be protected.

Standard construction of EcoShield® VpCI®-144: Neutral natural paper coated on one side with a water-barrier coating and on the other side with VpCI® material.

WATER VAPOR BARRIER PROPERTIES

EcoShield® VpCI®-144 compared with a comparable polyethylene coated paper (40# 3 msf paper, 6# PE Coating), and a commercial wax paper.

	VpCI®-144	Polycoated Paper	Waxed Paper
WVTR (g/hour•m ²)	0.61-0.69*	0.47-0.71*	6.5-6.9**

*Tested according to ASTM F1249, at 73 °F (23 °C), 50% RH

** Tested according to ASTM E-96, at 72 °F (22 °C), 50% RH

TABLE 1. REPULPABILITY ANALYSIS

Sample Identification	VpCI®-144 experimental	
	Trial 1	Trial 2
% of Rejects	13.9	13.6
% Fiber Yield of Sample (85%)	86.1	86.4
Observe and note deposition on vessel walls, screens, moving parts, etc.	No	No
Deposition Observed? No If yes, detail below	N/A	N/A
SUMMARY		
Operational Impact	Pass	Pass
Yield	Pass	Pass

Methods and Notes:

TAPPI T 240 om-12 Consistency (concentration) of pulp suspensions

For dry/semi-dry sheet pulps, samples aren't diluted or filtered. Consistency is determined after equilibrating the entire sample (cut into specimens) in a sealed plastic bag for a minimum of one hour, two specimens are removed from the plastic bag and dried for a minimum of four hours.

FBA Voluntary Standard for Repulping and Recycling
The final pH for Trial 2 fell below 6.5

4119 White Bear Parkway, St. Paul, MN 55110 USA
Phone (651) 429-1100, Fax (651) 429-1122
Toll Free (800) 4-CORTEC
info@cortecvci.com
https://www.cortecvci.com
https://www.cortecpackaging.com



LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.