



CORTEC

CORPORATION

Environmentally Safe VpCI®/MCI® Technologies

M-535

DESCRIPTION

M-535 is an ashless oil-based corrosion inhibiting formula designed for petroleum and synthetic lubricants in turbine, hydraulic, circulating, compressor, and gear systems during layup or intermittent operation. M-535 protects the system from corrosion caused by condensed moisture and trapped water that could otherwise lead to the failure of equipment components. Corrosion inhibitors in M-535 protect metal surfaces with which they are in direct contact and release molecules in the vapor phase. These Vapor phase Corrosion Inhibitors form a protective molecular layer on metal surfaces above the fluid level, allowing economical and efficient rust protection at a low dose. In addition, M-535 provides outstanding non-staining properties and is effective in most hydrocarbon-based lubricants (including naphthenic, paraffinic, PAO, etc.). Therefore, it is an excellent choice for industrial lubricant applications that require rust protection during layup.


PACKAGING & STORAGE

M-535 is available in 5 gallon (19 L) plastic pails and 55 gallon (208 L) metal drums.

To ensure best product performance, store in original packaging, indoors, and out of direct sunlight at 40-100 °F (4-38 °C).

Shelf life: 2 years

CORROSION INHIBITING ADDITIVES

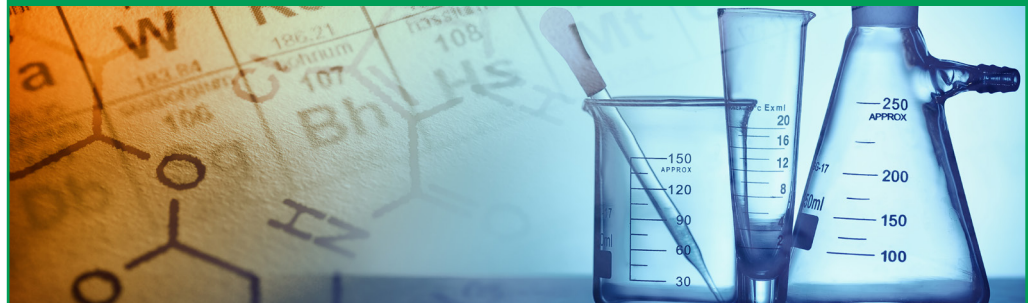

FEATURES

- Ashless chemistry
- Designed for use with different industrial lubricants
- Generally compatible with PAO and mineral-oil-based lubricants
- Suitable for layup conditions and intermittent operation
- Non-corrosive to copper

BENEFITS

- Provides contact and vapor-phase rust protection
- Cost-effective

TYPICAL PROPERTIES

Appearance	Light Yellow	
Specific Gravity (ASTM D1475)	7.2 lbs/gal (0.86 kg/L)	
Viscosity (ASTM D2196)	104 °F (40 °C)	36cP
	212 °F (100 °C)	5cP
Flash Point (ASTM D93)	140 °F (60 °C)	
Total Acid Number (ASTM D974)	50.5 mg KOH/g	
Vapor Phase Corrosion Protection (ASTM D5534 Mod.) ¹	Pass (at 3%)	
Corrosiveness to Copper (ASTM D130)	Does not affect	

¹Tested in some commercial oils. Untreated oils fail this test.

Properties listed above are typical of those obtained through normal production and do not constitute a specification.

APPLICATION

M-535 can be used to prevent rust in lubricating systems for turbines, gearboxes, compressors, hydraulic and circulating systems, and a wide variety of ashless lubricant applications that require intermittent operation during the layup period.

M-535

Solubility and compatibility: M-535 is soluble in petroleum and synthetic lubricant base stocks and most common solvents. However, verifying its solubility in base oils and its compatibility with other additives is recommended before use. Please contact Cortec® Technical Service with any questions on product compatibility.

Typical dosage rates for preservation are 3-5% by weight in the base oil for wet layup. Product may be fogged into void spaces for dry preservation at a rate of 0.5-1 fl. oz./ft³ (0.5-1 L/m³).

4119 White Bear Parkway, St. Paul, MN 55110 USA
Phone (651) 429-1100, Fax (651) 429-1122
Toll Free (800) 4-CORTEC
info@cortecvci.com
<https://www.cortecvci.com>
<https://www.cortecadditives.com>



LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.