

MCI®-2019

DESCRIPTION

MCI®-2019 is a 40% silane, solvent-based concrete water repellent containing time-proven Migrating Corrosion Inhibitors™ (MCI®). MCI®-2019 is a small molecule product that can easily penetrate into concrete, providing water repellency by chemically reacting with cementitious substrates under proper application. MCI®-2019 seals surface pores which prevents intrusion of chloride and carbonation and protects from the ingress of wind-driven rain. Treated areas retain their original appearance and are fully breathable – retaining their natural moisture-vapor transmission.

PACKAGING & STORAGE

MCI®-2019 is available in 5 gallon (19 L) pails, 55 gallon (208 L) drums and 275 gallon (1040 L) totes.

To ensure best product performance, store in original packaging, indoors, and out of direct sunlight at 40-100 °F (4-38 °C).

Shelf life: 1 year from date of shipment



HOW IT WORKS

MCI®-2019 combines a silane water repellent with Migrating Corrosion Inhibitor™ (MCI®) action. The silane component penetrates into the surface, chemically bonding with the substrate to provide a high level of water and chloride ion screening. The MCI® component has been shown to penetrate to the depth of embedded, metallic reinforcement, forming a protective monomolecular layer on it. This protective layer delays the onset of corrosion and reduces corrosion rates after initiation, greatly extending the service life of structures.

WHERE TO USE

MCI®-2019 is recommended for use on exterior above-grade concrete, brick masonry, concrete masonry units, and some natural stones.

ADVANTAGES

MCI®-2019 offers engineers, owners, contractors, DOTs, and government agencies a time proven corrosion inhibiting technology that will extend the service life of their reinforced concrete structures.

- Certified under EN 1504-2 (2+ system) for superficial protection of concrete
- VOC compliant to federal, California, and EU rules
- Protects against ingress of water, chlorides, and other aggressive contaminants
- Molecule size allows penetration into the smallest concrete pores
- Not a vapor barrier
- Enhances durability
- Reduces efflorescence
- Effectively delays onset of corrosion in new structures
- Effectively reduces corrosion rates on metals with existing corrosion
- Non-toxic; contains no nitrites, phosphates, or chromates
- No blushing, peeling, or yellowing
- Does not etch, stain, discolor, or otherwise harm glass or aluminum
- Helps protect against acid and chemical attack
- Easily applied by spray, brush, or roller

PHYSICAL PROPERTIES

Appearance	Light yellow liquid
pH	10-11 (1% in water)
Density	6.9-7.1 lb/gal (0.83-0.85 kg/L)

Shelf life is 12 months from date of shipment when stored in original, airtight containers at or below 77 °F (25 °C).

COVERAGE

Application rates will vary depending on surface porosity and number of applications. Approximate total coverage rate is 125-175 ft²/gal. (3-4.3 m²/L). It is recommended to apply two coats, each at a coverage rate of 250-350 ft²/gal (6-8.6 m²/L). Before applying, it is recommended that preliminary tests be carried out to determine proper application, dosing, etc.

PERFORMANCE DATA

NCHRP - Series II

Weight Gain During Saltwater Soak

Testing on concrete (2-inch cubes, 21 day immersion in 15% NaCl, 5,000 psi concrete) showed a 75% reduction in weight gain.

ASTM C-156: Water Vapor Transmission

Water vapor transmission of coated samples is excellent. MCI®-2019 did not significantly alter water vapor transmission characteristics when coated samples were compared to uncoated samples.

ASTM C-1218: Chloride Ion Intrusion at 0.5-1" Depth

The chloride ion intrusion was determined by ponding 4% NaCl on top of panel for 21 days. The MCI®-2019 coated samples showed a 78% decrease in chloride ion penetration.

NCHRP - Series IV

Accelerated Weathering Tests

24 weeks of accelerated weathering testing included salt water exposure, ultraviolet light exposure, and wetting and drying cycles. The test results show that a single coat at 125 ft²/gal (3 m²/L) reduced the average chloride ion intrusion into the concrete by 99% when compared to uncoated control specimens. The performance exceeds the 90% limit suggested in the NCHRP report No. 244.


ASTM C-672: Standard Test Method for Scaling Resistance of Concrete Surfaces Exposed to Deicing Chemicals

Test results indicate little or no change after 50 cycles of deicer freezing and thawing using air entrained concrete specimens whereas the control had moderate to severe scaling.

US Bureau of Reclamation M-82 Protocol

SURFACE PREPARATION

Surfaces should be clean, dry, and free of dirt, oil, grease, efflorescence, mold, salt, laitance, coatings, membranes, and asphalt. Acceptable cleaning methods include shotblasting, sandblasting, or waterblasting. Surfaces should be superficially dry with no visibly damp areas.

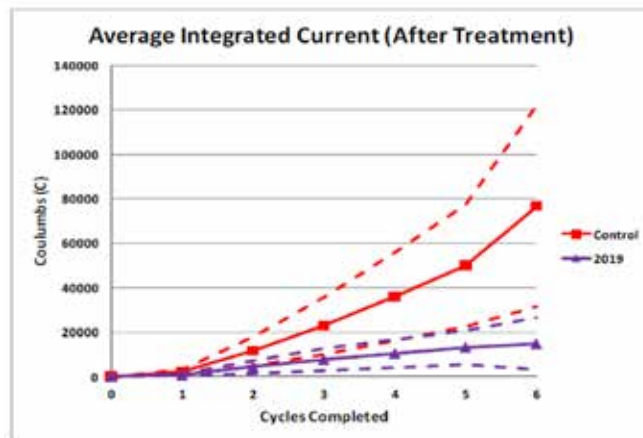

APPLICATION

Stir thoroughly before use. Apply MCI®-2019 by using an airless sprayer, roller, or brush. When a brush or roller is used, repeated applications should be made until the surface remains moist for a few minutes. If an airless sprayer is used, application should continue until the substrate is thoroughly saturated. Sprayers should be fitted with solvent resistant hoses and gaskets.

For best results, MCI®-2019 should be applied in two coats using a wet on wet technique where the second coat is applied when the surface is wet, but not glossy from the first coat. During application, precautions should be taken to protect the surrounding area from overspray and run-off. MCI®-2019 may be applied to damp surfaces, although dry surfaces are preferred to achieve maximum penetration into the substrate.

If a coating will be used over MCI®-2019, a 7-day period is recommended before coating. An adhesion test should be performed to verify compatibility.

Please refer to MCI®-2019 Product Specification for more detailed instructions.

CONSIDERATIONS

- MCI®-2019 should be kept away from heat and open flame
- MCI®-2019 should not be used on structures under hydrostatic pressure
- Do not apply when temperature is expected to be at or below 5 °C (40 °F) or on extremely windy days when evaporation of solvent would be too rapid
- MCI®-2019 will not penetrate water repellents, coatings, paints, membranes, or asphalt
- Fresh concrete should be allowed to cure for 28-days before application; repair work should be completed at least 3-days prior to application of MCI®-2019

Contact Cortec® Technical Service for further guidance if necessary.

EN 1504:2 Performance Testing Table

Essential Characteristics	Performance	Test Standard	Harmonized Technical Specification
Drying Test for Hydrophobic Impregnation	DRC (%)	UNE-EN 13579:2003	EN 1504-2:2005
	66.3		
Water Absorption and Resistance to Alkali for Hydrophobic Impregnation	AR (%)	BS EN 13580:2002	
	6.4		
	ARALK(%)		
	7.5		
Depth of Penetration	11.0 mm	EN 13579 + EN 14630	



4119 White Bear Parkway, St. Paul, MN 55110
 Phone (651) 429-1100
 Toll Free (800) 4-CORTEC
 productinfo@cortecvci.com
 www.cortecvci.com
 www.cortecmci.com



LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Revised: 11/07/2025. Supersedes: 01/14/2025.

©2025 Cortec® Corporation. All Rights Reserved. Unauthorized copying and/or manipulation of these materials, in any form, is strictly prohibited without the prior written authorization of Cortec® Corporation. ISO accreditation applies solely to Cortec's processes.