



S-69 P, S-69 PMF, and S-69 B

Powder VpCI® Water Treatment Building Blocks



PRODUCT DESCRIPTION

S-69 Powders are Vapor phase Corrosion Inhibitors (VpCI®) developed as corrosion prevention additives for the water treatment industry. These building blocks provide multimetal protection, including galvanized steel and yellow metals. The VpCIs form a strong monomolecular layer on the metal surface that protects in all three phases-liquid, vapor, and the vapor-liquid interface. S-69 Powders provide water treatment companies with the ability to incorporate Cortec® VpCI technology into their specific formulations.

Note: S-69 Powder is also available in a molybdenum free version: S-69 PMF. In addition, a lower pH version exists as S-69 B, which contains a borate based buffer.

TYPICAL APPLICATIONS

S-69 Powders are anticorrosion additives to water treatment formulations to replace chromates, nitrites, phosphonates, and other types of restricted corrosion inhibitors. Powder should be pre-diluted, forming a clear homogenous solution prior to addition into the system being treated.

DOSAGE RATES

- a) Closed loop-fresh water
Concentration of S-69 Powders under operating conditions for a closed loop system formulation start at 1500 ppm - 2000 ppm.
- a) Closed loop-brine
Concentration of S-69 Powders under operating conditions for a closed loop system formulation is 1-5 %.
- c) Open loop-fresh water
Concentration varies with formulations but can be used a low as 10-15 ppm in continuous feeds.

FEATURES

- Protects carbon steels, zinc, stainless steel, galvanized steel, copper, and other metals
- Use S-69 B for aluminum protection
- Prevents corrosion and pitting
- Effective for open and closed loop cooling systems
- Contains contact and vapor phase corrosion inhibitors
- Can be used as a corrosion inhibitor additive in the majority of water treatment programs
- Compatible with the majority of commercially available biocides and antiscalants
- Nitrite, chromate, and heavy metal free
- Readily water-soluble powder for easy application
- Environmentally friendly formulation
- Easily traceable utilizing a Molybdenum test kit. S-69 P contains 2.1% Mo by weight, in the form of $\text{Na}_2\text{MoO}_4 \cdot 2\text{H}_2\text{O}$ (at 5.2% of total formulation). See reversed side for Mo vs. S-69P concentration chart

EPA/600/4-90/027F

Acute 48-hour Static-renewal toxicity test:

EE#	Appendix	Sample ID	NOEC/LOEC, ppm	
			D.pulex	P.Promelas
E-17766-01	A	S-69P	10,000/>10,000	10,000/>10,000

TYPICAL PROPERTIES

Appearance White to off-white powder
pH of S-69 P 10-12.5 (1% aqueous)


ppm in DI Water	Conductivity
1000	~600 μS
2000	~1700 μS
3000	~2000 μS
5000	~2700 μS

pH of S-69 B 8.5-9.5 (1% aqueous)

ppm in DI Water	Conductivity
250	~136 μS
2000	~259 μS
1000	~498 μS



Theoretical concentration of Molybdenum vs. S-69P

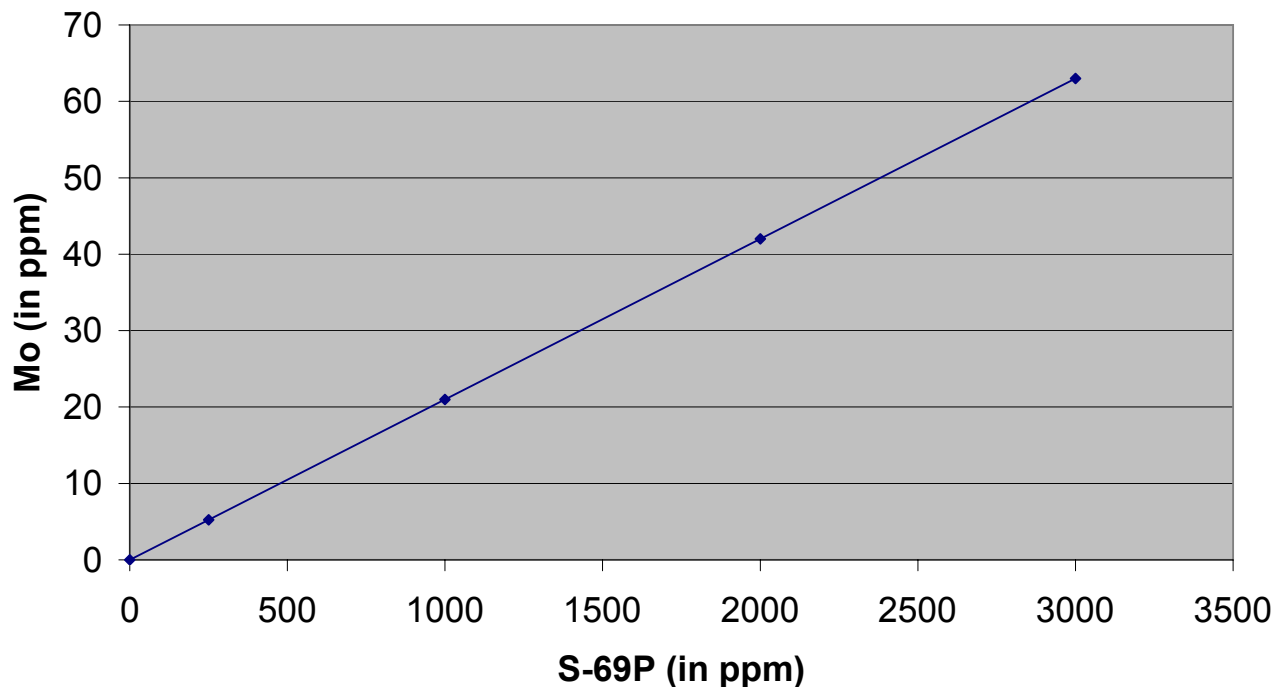

FOR INDUSTRIAL USE ONLY

KEEP OUT OF REACH OF CHILDREN

KEEP CONTAINER TIGHTLY CLOSED

NOT FOR INTERNAL CONSUMPTION

CONSULT MATERIAL SAFETY DATA SHEET FOR MORE INFORMATION

PACKAGING AND STORAGE

S-69 Powders are packaged in 5 lb (2.27 kg) boxes and 50 lb (22.7 kg) and 100 lb (45.3 kg) drums. They should be stored in a tightly closed container. The shelf life is 2 years.

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



Distributed by:

4119 White Bear Parkway, St. Paul, MN 55110 USA
Phone (651) 429-1100, Fax (651) 429-1122
Toll Free (800) 4-CORTEC, E-mail info@cortecvci.com
Internet <http://www.CortecVCI.com>

printed on recycled paper 100% post consumer

Revised 10/8/09, Cortec Corporation 2000-2009. All rights reserved. Supersedes: 10/7/08.
Cortec® and VpCl™ are trademarks of Cortec Corporation. © 2008, Cortec Corporation. All Rights Reserved. Copying of these materials in any form without the written authorization of Cortec Corporation is strictly prohibited.