

Editorial Contact:
Cortec® Europe Advertising Agency

Ana Juraga
+ + 385 1 48 54 486

ana.juraga@ecocortec.hr

Company Contact:
Cortec® Corporation:

Ivana Liposcak
+ 385(0) 31 705 011

iliposcak@cortecvci.com



Attention: Editor
June 09, 2021
PRESS RELEASE



Easy Corrosion Solution for Post-Tension Grouting Delays-

MCI® 309 Recognized in Numerous Projects in Europe!

Cortec's Patented MCI® technology aimed to protect reinforcing metal in concrete from corrosion is widely used around the globe. Application of MCI® products experienced rapid growth in recent years due to number of factors such as proven efficiency and environmental safety. By using this technology, corrosion initiation is delayed and the lifecycle of structures is significantly extended. Designers and contractors across Europe are



now using MCI® technology in the most demanding projects. Currently, MCI® 309 is used during bridge construction of Ponte Taro Bridge in Italy. New cables will be grouted with cement grout in about 2-3 months. After tensioning of the cables MCI® -309 powder will be applied to ensure proper protection of

the cables during this period. Unfortunately, during large construction projects such as bridges that may take many years to complete delays are very common. For structures that use post-tensioning, grouting is one step that is often postponed for several weeks or months due to cold weather, transit of precast



segments, or other project delays. During this time, post-tensioning (PT) tendons installed in PT ducts are at risk for corrosion, especially in environments of extreme moisture, chlorides, or high temperatures. While it can be difficult to protect these tendons in such hard-to-reach areas, Cortec® has provided a simple solution by offering MCI®-309—a Migrating Corrosion Inhibitor™ that requires no flushing before grouting.

MCI®-309 has been recently improved by removing silica from its formulation.

Protecting Post-Tension Cables from Corrosion

MCI®-309 is a powder-based Migrating Corrosion Inhibitor™ for protection of ferrous and aluminum metals located in recessed areas, interior cavities, and structural voids. It is an extremely efficient dry method of protecting metals within an enclosed space by simply dosing MCI®-309 powder into the void. Upon application, it vaporizes and forms a molecular layer of



corrosion inhibitors on the metal surface. If this layer is ever compromised (for example, by moisture or by opening the enclosed space), it will be automatically replenished by new vapor being continuously

released from the powder carrier. MCI®-309 is considered ambiodic (mixed), meaning it protects both anodic and cathodic corrosion sites of the metal. It does not contain silica, silicates, phosphates, nitrites, or heavy metals.

Streamline the Grouting Process

MCI®-309 is one of the easiest and most cost-effective method on the market for corrosion protection of prestressed tendons. It requires little to no surface preparation and is easy to apply by dusting, fogging, or sprinkling. It is also easy to remove by air gun or water. As a matter of fact, the removal of MCI®-309 is typically not required prior to concrete or grout placement. This is a huge advantage over oily or grease-



based corrosion inhibitors that need to be cleaned off before grouting—introducing moisture into the cavity by means of an expensive and time-consuming cleaning process. MCI®-309 does not affect physical properties of concrete and grout. Testing has also confirmed that MCI®-309 does not affect strand pull-out strength compared to a control.

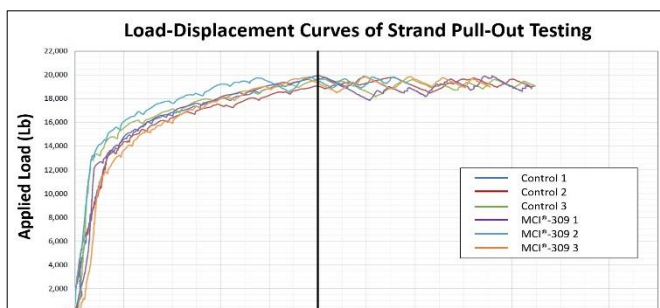


Figure 1: Load-Displacement Curves, AET Project No: 29-20452

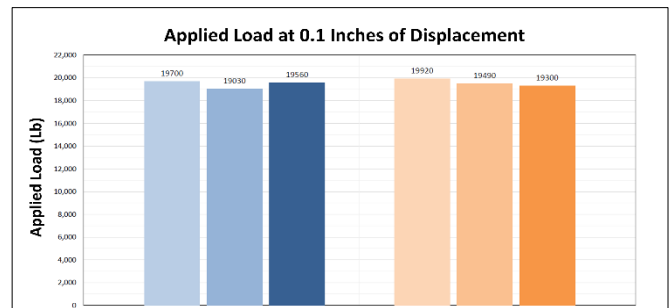


Figure 2: Applied Load, AET Project No: 29-20452

There are countless potential uses for MCI®-309, the most obvious being protection of PT strands placed in bridges but not yet grouted. Sometimes this is needed on location where the bridge is going up; sometimes it is offsite where bridge segments are precast and prepared for transit. MCI®-309 can also be

fogged into a variety of other tubular structures, pipes, and vessels where inaccessible or recessed metal surfaces are at risk for corrosion but are otherwise difficult to reach. While MCI®-309 is typically used for construction and grouting delays of several weeks or months, the product can actually provide up to 24 months of protection!



Bridge over the Roskilde Fjord, new Frederikssund bridge in Denmark. MCI® is used for corrosion protection of PT concrete segments.

Read about the Denmark bridge construction here:

https://www.cortecasehistories.com/?s2member_file_download=access-s2member-level1/ch615.pdf

To view product data sheet please visit:

<https://www.cortecvci.com/Publications/PDS/MCI-309.pdf>

Visit our Cortec® MCI® website: <https://www.cortecmci.com/>

[illegible]

Need a High-Resolution Photo? Visit: www.cortecadvertising.com

Cortec® Corporation is the global leader in innovative, environmentally responsible VpCI® and MCI® corrosion control technologies for Packaging, Metalworking, Construction, Electronics, Water Treatment, Oil & Gas, and other industries. Our relentless dedication to sustainability, quality, service, and support is unmatched in the industry. Headquartered in St. Paul, Minnesota, Cortec® manufactures over 400 products distributed worldwide. ISO 9001, ISO 14001:2004, & ISO 17025 Certified. Cortec Website: <http://www.cortecvci.com>